

GOOSENECK COUPLING

TE4C970

2 5/16" ball size

Weld-on

Rated at 9070kg

Maximum download rating: 2700kg

Adjustable capped pipe

Height: 750mm, extended height: 1029mm

Product meets SAE J2638 - 5th wheel and gooseneck attachment performance up to 20,000lbs



GOOSENECK HITCH BALL

TE4C974

2 5/16" Atwood folding hitch ball

Folds away, leaving the truck deck flush

Minimal opening requirement: a 215mm x

292mm hole is all that is needed in the truck deck. All other attachments are hidden from view

No tools required: simply fold down the hitch ball when not in use



Folded away



Ready for use

Q20

TE4C994



9000kg towing capacity

2265kg pin weight capacity

10 year warranty

Positive locking dual jaw assembly and lock indicators for peace of mind

Spherical axle bearing ensures smooth towing

Complete with mounting rail and hardware

3 point progressive resistance limits lateral movement 7°

Short throw single handle operation

Lockable


Total weight: 55kg

Self aligning head for easy hook-ups

Dimensions: 558mm (L) measured from centre of front rail to centre of rear rail x 736mm (W) from leg centre pin hole to leg centre pin hole

E16

TE4C990

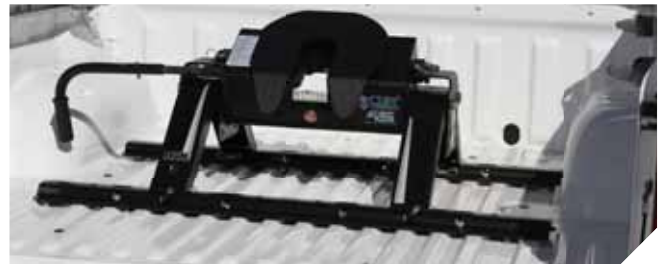

7200kg towing capacity

1800kg pin weight capacity

5 year warranty

Dual pivot head

Single handle operation

Complete with mounting rail and hardware

Auto locking mechanism

4 position height adjustment

Anti-rattle skid plate

Total weight: 45kg

Dimensions: 558mm (L) from centre of front rail to centre of rear rail x 520mm (W) from leg centre pin hole to leg centre pin hole

2" WELD-ON KINGPIN

TE4C997

1/2" thick bolster plate x 8" diameter

