

# HOSE & FITTING KIT

Complete with installation instructions.


PART NO	DESCRIPTION	HOSES
TE5HKJ1	Disc Brake Single Axle 45° End suits Deemaxx & Kodiak calipers	2
TE5HKJ2	Disc Brake Tandem Axle 45° End suits Deemaxx & Kodiak calipers	4
TE5HKJ3	Disc Brake Triple Axle 45° End suits Deemaxx & Kodiak calipers	6
TE5HKTR1	Disc Brake Single Axle	2
TE5HKTR2	Disc Brake Tandem Axle	4
TE5HKTR3	Disc Brake Triple Axle	6
TE5HKSS1 (Marine)	Disc Brake Single Axle with stainless braided hoses	2
TE5HKSS2 (Marine)	Disc Brake Tandem Axle with stainless braided hoses	4
TE5HKDR	Drum Brake Single Axle	1
TE5HKDR2	Drum Brake Tandem Axle	2



## BRAKE HOSES



Stainless steel braided hoses have a clear plastic cover and stainless steel fittings

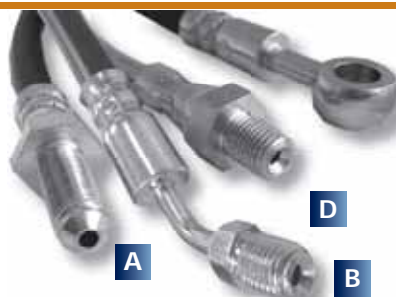

A 3/8" SAE Male Drill Point Flare. Thread Length = 18mm – 21mm.

B 3/8 SAE Male Inverted flare. Thread length = 10mm – 12mm.

C Banjo. Diameter = 10.10mm.

Uses 3/8" SAE Banjo Bolt Part Number TE195HDB (sold separately).

D 3/8 SAE Male Running Nut, 45° End

PART NO	DESCRIPTION	HOSE	LENGTH	ENDS	FITTING	FITTING
TE195HDR	Drum Brake Hose	Rubber	400mm	Steel	A	D
TE195HDI	Disc Brake Hose	Rubber	500mm	Steel	A	D
TE195HDSS	Disc Brake Hose	Braided SS	500mm	Stainless Steel	A	D
TE195HBANJO	Banjo Brake Hose	Rubber	300mm	Steel	A	C
TE195HDJ	Disc Brake Hose 45° End	Rubber	500mm	Steel	A	B

## STEEL BUNDY TUBING

Zinc electroplated finish.

### TE5HBUNDY3/16

Cut to length

### TE5HBUNDY-7.5

7.5m roll

### TE5HBUNDY-30

30m roll



## CUPRO-NICKEL TUBING

### TE5HK1

A seamless 90% copper / 10% nickel automotive approved high-pressure brake line. Unlike copper, it won't harden and is superb to work with.

3/16" x 7.6 metre rolls.

